

IN.14

2x INPUT FOR LVDT SENSORS




INPUT FOR LVDT SENSORS

LVDT 1 / 3 / 5 VAC with frequency 2,5 / 5 / 10 kHz



CARD SETTINGS




The following parameters are edited in the setting

Select the **Position of the card** to be set. Use buttons to scroll among the fitted cards.

Type of the card fitted in the specified position.

Data transfer **priority** of the selected card. Bigger number of plugged-in cards slows down data flow on the bus. It can be optimized by setting priorities. The real value of the data flow can be then controlled in diagnostics. The maximum achievable data flow in slots A is 1100 frames/s, in slots B 550 frames/s.

Channel to be set. Use buttons ◀ ◀◀ ▶▶ ▶ to scroll among the channels. Number of possible selectable channels is determined by the card, which is being set

Button  is used to navigate to the settings of the selected channel.

INSTALLATION OF A NEW CARD

When installing a new card, always make sure the recorder is disconnected from the power supply!

1. Remove the recorder's back cover and break off the plugs covering the position where you intend to insert the new card. It is recommended to place analogue cards into faster slots in column „A“ (Speed of the bus: Slot „A“ 1 ms, Slot „B“ 2 ms).
2. Remove the card from its shipping container and from the ESD packaging and slide it carefully into the selected slot until you feel a gentle click
3. Replace the back cover and turn the device on
4. Setting of the card is described in the preceding paragraph

IN.14

TECHNICAL DATA

INPUTS

| | | |
|--------|-------------|---------------------------------------|
| Number | 2, isolated | |
| LVDT | Range | 1/3/5 VAC with frequency 2,5/5/10 kHz |
| | Connection | 2-, 5- or 6-wire |

TECHNICAL SPECIFICATION

| | |
|-------------------|--|
| TC | 50 ppm/°C |
| Accuracy | ±0,2 % of range (valid for 10 measur./s) |
| Rate | < 1.000 measurements / s |
| Overload capacity | 10x (t < 100 ms), 2x |
| Digital filters | Floating average, Exponential average |
| Watch-dog | reset after 500 ms |
| Calibration | at 25°C and 40 % r.h. |

POWER SUPPLY

| | |
|--------------|-----------------|
| Power supply | 3,3 VDC, 24 VDC |
| Consumption | max. 150 mA |

MECHANIC PROPERTIES

| | |
|--------------|------------|
| Dimensions | 65 x 98 mm |
| Installation | to OMR 700 |

OPERATING CONDITIONS

| | |
|------------------------|--|
| Connection | connector terminal board, cross section < 1,5 mm ² |
| Working temperature | -20°...60°C |
| Storage temperature | -20°...85°C |
| IP rating | IP00 |
| Construction | safety class I |
| El. safety | EN 61010-1, A2 |
| Dielectric strength | 2,5 kVAC over 1 min between bus and inputs 1 kVAC over 1 min between inputs |
| Insulation resistance* | for pollution degree II, measuring cat. III. Input / Bus - 300 V (PI), 150 (DI) Input / Input - 150 V (PI), 100 (DI) |
| EMC | EN 61326-1 (Industrial use) |
| Seismic resistance | IEC 980: 1993, čl.6 |

* PI - Primary insulation, DI - Double insulation


IN.14

CONNECTION

IN.14

ORDER CODE

IN.14

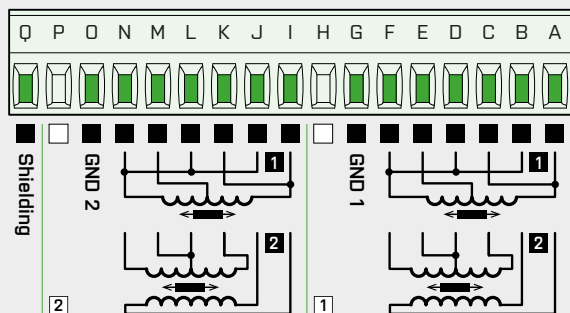

- 1 3-wire LVDT sensors
- 2 5-wire LVDT sensors


IN.14

Specifications

Used only for customised versions



00



ORBIT MERRET, spol. s r. o.
Vodňanská 675/30
198 00 Praha 9
Czech republic

tel.: +420 281 040 200
fax.: +420 281 040 299
orbit@merret.eu
www.orbit.merret.eu

