

PASSIVE LOOP DISPLAY 4...20 mA

- 4-DIGIT PROGRAMMABLE PROJECTION
- INPUT: 4...20 mA
- LINEARIZATION
- SIZE OF DIN 50,5 X 28,5 MM
- POWER SUPPLY FROM THE LOOP

OMM 335PAS

OMLINK

OMM 335PAS is a 4-digit passive analog loop display 4...20 mA.

The instrument is based on a microcontroller with a very low power consumption and an A/D converter, which ensures good accuracy and easy operation of the instrument.

The 22 mm cross-section of the circular instrument body allows its convenient mounting into mosaic and signaling panels.

OMM 335PAS

PASSIVE LOOP DISPLAY 4...20 mA

OPERATION

The instrument is set and controlled by two buttons located on its the body.

Standard equipment is the OM Link USB interface, which, when using the control program, allows you to edit and archive all device settings and to update firmware.

All settings are stored in FLASH memory (they hold even after the power is turned off).

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Setting: manual, optional projection on the display may be set in menu for both limit values of the input signal, e.g. input 4...20mA > 0...250,0

Projection: -999...9999

FUNCTIONS

Linearization: linear interpolation in 50 points (only via OM Link)

NEW

TECHNICAL DATA

INPUT

PAS	Number	1
	Range	fixed 4...20 mA < 5,5 V

PROJECTION

Display: -999...9999, single color LED, 7-segment
Digit height: 14 mm
Display color: red or green
Decimal point: adjustable - in menu
Brightness: fixed

INSTRUMENT ACCURACY

TK: 50 ppm/°C
Accuracy: ±0,15% of range + 1 digit
 (for projection -999...9999)
Rate: 0,1...100 measur./s
Overload capacity: 2x
Linearization: linear interpolation in 50 points [only via OM Link]
OM Link: Company communication interface for operation, setting and update of instruments.[microUSB]
Watch-dog: reset after 500 ms
Calibration: at 25°C and 40 % r.h.

COMPARATORS

Type: digital, menu adjustable
Hysteresis mode: switching limit, hysteresis band „Lim ±1/2Hys.“ and time [±99,9 s] determining the switching delay
Output: 2x Power MOSFET, [30 VDC/0,5 A]

POWER SUPPLY

from current loop 4...20 mA, voltage drop < 5,5 V

MECHANIC PROPERTIES


Material: PA66, incombustible UL 94 V-0
Dimensions: 50,5 x 28,5 x 66 mm [w x h x d]
Panel cutout: ø 22,5 mm

OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1,3 mm²
Stabilization period: within 15 minutes after switch-on
Working temperature: -20°...60°C
Storage temperature: -20°...85°C
Protection: IP65 [front panel only]
EL safety: EN 61010-1, A2
EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

CONNECTION

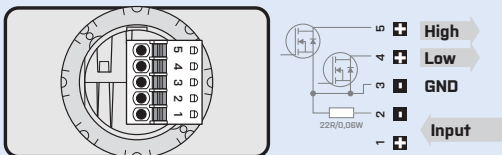

ORDER CODE

OMM 335PAS

- □ - □

Display color	red	1	
	green	2	
Specification	customized version, do not fill in		00

Basic configuration of the instrument is indicated in bold.